

Cerniera Pivot-Pro foro 40, ammortizzata, sgancio rapido.
Pivot-Pro soft-close hinge box 40, clip-on.

DTC




DATI TECNICI/TECHNICAL DATA mm


	95°
	40

COD.	DESCRIZIONE / DESCRIPTION		
01.503000008	PIVOT-PRO 95° Ø40 SOFT COLLO 0 NICKEL / PIVOT-PRO HINGE 95° Ø40 SOFT C.0 NICKEL	25	200
01.5030000908	PIVOT-PRO 95° Ø40 SOFT COLLO 9 NICKEL / PIVOT-PRO HINGE 95° Ø40 SOFT C.9 NICKEL	25	200
01.5030001808	PIVOT-PRO 95° Ø40 SOFT COLLO 18 NICKEL / PIVOT-PRO HINGE 95° Ø40 SOFT C.18 NICKEL	25	200


Applicazione con sormonto totale anta
Full overlay door installation

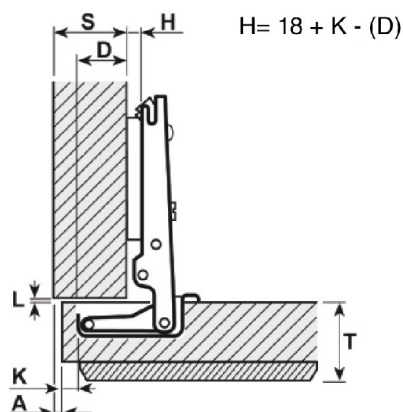

Applicazione con mezzo sormonto anta
Half overlay door installation

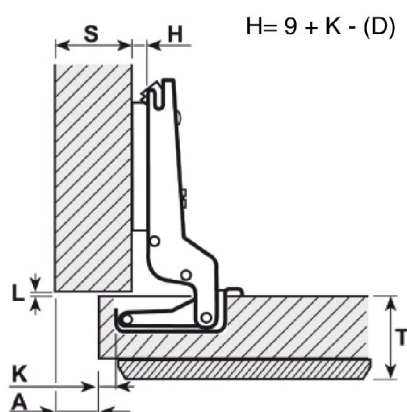

Applicazione con anta in luce
Inset door installation

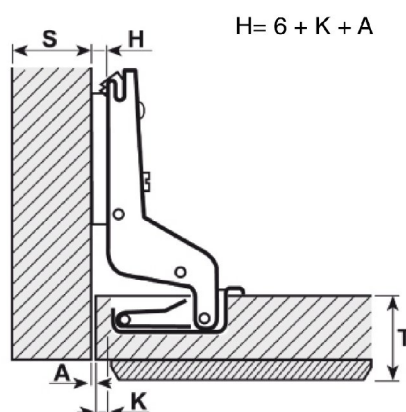

S= spessore fianco
Thickness of the cabinet side
 D= sormonto desiderato
Required door overlay

T= spessore anta
Door thickness
 K= distanza foratura filo anta
Drilling distance

A= aria
Reveal
 L= luce tra anta e scocca
Gap between door and carcass



H= altezza basetta
Height of the mounting plate
 G= costante della cerniera
Hinge constant

Fuga minima per apertura anta
Space needed to open the door

T=	20	21	22	23	24	25	26	27	28	29	30	31	32	33 - 40
K=3 A=	0.3	0.5	0.6	0.8	1.0	1.2	1.4	1.6	1.9	2.2	2.5	2.8	3.2	3.5 - 9.7
K=4 A=	0.3	0.5	0.6	0.8	1.0	1.2	1.4	1.6	1.9	2.1	2.4	2.8	3.1	3.4 - 9.1
K=5 A=	0.3	0.5	0.6	0.8	0.9	1.1	1.4	1.6	1.8	2.1	2.4	2.7	3.0	3.4 - 8.5
K=6 A=	0.3	0.5	0.6	0.8	0.9	1.1	1.3	1.6	1.8	2.1	2.3	2.7	3.0	3.3 - 7.9
K=7 A=	0.3	0.4	0.6	0.7	0.9	1.1	1.3	1.5	1.8	2.0	2.3	2.6	2.9	3.3 - 7.3
K=8 A=	0.3	0.4	0.6	0.7	0.9	1.1	1.3	1.5	1.7	2.0	2.3	2.6	2.9	3.2 - 6.9
	-	-	-	-	-	-	-	-	-	-	-	-	-	- -
K=15 A=	0.3	0.4	0.5	0.6	0.8	1.0	1.1	1.3	1.6	1.8	2.0	2.3	2.5	2.8 - 5.4

Aria minima per apertura anta
Space needed to open the door

T=	20	21	22	23	24	25	26	27	28	29	30	31	32	33 - 40
K=3-9 L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0 - 0.0
K=10 L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.3 - 0.8
K=11 L=	0.4	0.5	0.6	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.3	1.4 - 1.8
K=12 L=	1.4	1.5	1.6	1.7	1.7	1.8	1.9	1.9	2.0	2.1	2.1	2.2	2.3	2.4 - 2.8
K=13 L=	2.4	2.5	2.6	2.7	2.7	2.8	2.9	2.9	3.0	3.1	3.1	3.2	3.3	3.3 - 3.8
K=14 L=	3.4	3.5	3.6	3.6	3.7	3.8	3.9	3.9	4.0	4.1	4.1	4.2	4.3	4.3 - 4.8
K=15 L=	4.4	4.5	4.6	4.6	4.7	4.8	4.9	4.9	5.0	5.1	5.1	5.2	5.3	5.3 - 5.8



I valori considerano che l'anta abbia un raggio squadrato e saranno ridotti se l'anta ha un bordo raggato.
 The above values are calculated on square edges doors and they have to be reduced if the doors have radlused edges.